



500 Series

Service and Installation Manual

Please read this manual completely before attempting to install or operate this equipment! **Notify carrier of damage!** Inspect all components immediately. See page 2.



Effective May 2003

CONTENTS

| | |
|---|------------|
| RECEIVING & INSPECTING EQUIPMENT..... | 2 |
| SPECIFICATIONS | 3 |
| PRESSURE CONTROL SETTINGS..... | 5 |
| INSTALLATION..... | 5, 6 |
| OPERATION | 5, 6 |
| CARE & CLEANING..... | 6 |
| WIRING DIAGRAMS | |
| 500-CR self-contained refrigerated units..... | 7 |
| 500-OR open refrigerated units..... | 7 |
| 500-CD dry storage units..... | 8 |
| 500-CH curved heated units..... | 8 |
| EXPLODED VIEWS & PARTS LISTS | |
| 537-CD | 9 |
| 549-CD | 9 |
| 561-CD | 10 |
| 573-CD | 10 |
| 537-CR, CRR | 11 |
| 549-CR, CRR | 11 |
| 561-CR, CRR | 12 |
| 573-CR, CRR | 12 |
| 549-CH | 13 |
| 561-CH | 13 |
| 573-CH | 14 |
| 549-OR | 14 |
| FLUORESCENT LIGHT ASSEMBLY | 15 |
| DOOR ASSEMBLY..... | 16 |
| REFRIGERATION ASSEMBLES | 17 |
| FOOD WELL ASSEMBLY | 18 |
| REPLACEMENT PARTS LIST | 19 |
| STANDARD LABOR GUIDELINES..... | 20 |
| STANDARD WARRANTIES..... | 21-22 |
| AUTHORIZED PARTS DEPOTS..... | back cover |

SERIAL NUMBER LOCATION

The **Serial number** on all 500 Series units is located on the rear of the unit, near the ON/OFF switch.

Always have the serial number of your unit available when calling for parts or service. A complete list of authorized Delfield parts depots is shown on the back cover of this manual.

©2003 The Delfield Company. All rights reserved. Reproduction without written permission is prohibited. "Delfield" is a registered trademark of The Delfield Company.

RECEIVING AND INSPECTING THE EQUIPMENT

Even though most equipment is shipped crated, care should be taken during unloading so the equipment is not damaged while being moved into the building.

1. Visually inspect the exterior of the package and skid or container. Any damage should be noted and reported to the delivering carrier immediately.
2. If damaged, open and inspect the contents with the carrier.
3. In the event that the exterior is not damaged, yet upon opening, there is concealed damage to the equipment notify the carrier. Notification should be made verbally as well as in written form.
4. Request an inspection by the shipping company of the damaged equipment. This should be done within 10 days from receipt of the equipment.
5. Check the lower portion of the unit to be sure adjustable feet are not bent.
6. Also open the compressor compartment housing and visually inspect the refrigeration package. Be sure lines are secure and base is still intact.
7. Freight carriers can supply the necessary damage forms upon request.
8. Retain all crating material until an inspection has been made or waived.

Uncrating the Equipment

First cut and remove the banding from around the crate. Remove the front of the crate material, use of some tools will be required. If the unit is on legs remove the top of the crate as well and lift the unit off the skid.

500 SERIES SPECIFICATIONS

| MODEL NUMBER | DELFIELD PART # | VOLTS/HERTZ PHASE | AMPS (includes lights & fan) |
|----------------------------------|-----------------|-------------------|---------------------------------|
| Dry Storage Display Cases | | | |
| 537-CD | 078-5371 | 115/60/1 | 5.0 |
| 549-CD | 078-5491 | 115/60/1 | 5.0 |
| 561-CD | 078-5611 | 115/60/1 | 5.0 |
| 573-CD | 078-5731 | 115/60/1 | 5.0 |

| MODEL NUMBER | DELFIELD PART # | NUMBER OF 12 X 20 WELLS | VOLTS/HERTZ PHASE | AMPS |
|-----------------------------|-----------------|-------------------------|--------------------|-----------|
| Heated Display Cases | | | | |
| 549-CH | 078-5494 | 3 | 120, 208-240V/60/1 | 19.0/21.0 |
| 561-CH | 078-5614 | 4 | 120, 208-240V/60/1 | 24.0/27.0 |
| 573-CH | 078-5734 | 5 | 120, 208-240V/60/1 | 30.0/34.0 |

| MODEL NUMBER | DELFIELD PART # | H.P.* | VOLTS/HERTZ PHASE | AMPS | EVAPORATOR CAPACITY BTU/°TD | CABINET LOAD BTU/HOUR |
|--|-----------------|-------|-------------------|------|--------------------------------|--------------------------|
| Remote Refrigerated Display Cases | | | | | | |
| 537-CRR | CONSULT FACTORY | 1/2* | 115/60/1 | 5.0 | 180 | 1730 |
| 549-CRR | 078-5493 | 1/2* | 115/60/1 | 5.0 | 190 | 2250 |
| 561-CRR | 078-5613 | 3/4* | 115/60/1 | 6.0 | 190 | 2770 |
| 573-CRR | 078-5733 | 3/4* | 115/60/1 | 6.0 | 290 | 3290 |

*Recommended horsepower

| MODEL NUMBER | DELFIELD PART # | H.P. | VOLTS/HERTZ PHASE | AMPS | CABINET LOAD BTU/HOUR | SYSTEM CAPACITY BTU/HOUR | REFRIGERATION CHARGE 404A |
|--|-----------------|------|-------------------|------|--------------------------|-----------------------------|------------------------------|
| Self-Contained Refrigerated Display Cases | | | | | | | |
| 537-CR | 078-5372 | 1/2 | 115/60/1 | 12.0 | 1730 | 3258 | 32 oz. |
| 549-CR | 078-5492 | 1/2 | 115/60/1 | 12.0 | 2250 | 3316 | 32 oz. |
| 561-CR | 078-5612 | 3/4 | 115/60/1 | 16.0 | 2770 | 4919 | 48 oz. |
| 573-CR | 078-5732 | 3/4 | 115/60/1 | 16.0 | 3290 | 5387 | 48 oz. |

| MODEL NUMBER | DELFIELD PART# | H.P. | VOLTS/HERTZ PHASE | AMPS | CABINET LOAD BTU/HOUR | SYSTEM CAPACITY BTU/HOUR | REFRIGERATION CHARGE 404A |
|--|----------------|------|-------------------|------|--------------------------|-----------------------------|------------------------------|
| Open Front Refrigerated Display Cases | | | | | | | |
| 549-OR | 078-5495 | 1/2 | 115/60/1 | 12.0 | 2030 | 3354 | 32 oz. |

INSTALLATION: 500 CD, CR, CRR & OR

Location



To meet NSF standards, all units must be sealed to the floor.

Be sure the location chosen has a floor strong enough to support the total weight of the cabinet and contents. Contents fully loaded in this product line can weigh as much as 1500 lbs. Reinforce the floor as necessary to provide for maximum loading.

For the most efficient refrigeration, be sure to provide good air circulation inside and out. Do not pack the refrigerator so full that air cannot circulate. Be sure that the exterior of the unit has access to ample air. Avoid hot corners and locations near stoves and ovens.

Leveling

To level unit, simply lower the four adjustable rubber feet located under the unit to the floor and adjust until unit is level. A level cabinet will perform better because the drain will empty properly, the doors will line up with the frames correctly and the cabinet will not be subject to undue strain.

Plumbing

Self-contained models are standard with a condensate evaporator. If the evaporator fails, the unit's drain must have an outlet to an appropriate drainage area or container.



Moisture collecting from improper drainage can create a slippery surface on the floor and a hazard to employees. It is the owner's and operator's responsibility to provide a container or outlet for drainage.

Electrical connection

Refer to the amperage data on page 3, the serial tag, your local code or the National Electrical Code to be sure the unit is connected to the proper power source. A protected circuit of the correct voltage and amperage must be run for connection of the line cord, or permanent connection to the unit.

Self-contained units have an ON/OFF switch located on the operators side. Simply turn the switch to ON to begin operation.



The power switch should be turned to OFF and the unit disconnected from the power source whenever performing service or maintenance functions.

OPERATION: 500 CD, CR, CRR & OR

On self-contained models, after turning the ON/OFF switch to ON, the unit's compressor will begin operating. Delfield display cases are designed to maintain an operational temperature of 36°F to 40°F.

Do not load the storage area in a way that restricts the air flow. Overloading will result in the loss of temperature. Do not throw items into the storage area. The interior of the cabinet and the blower coil may be damaged by this type of neglect, which is not covered under your warranty.



These units use HFC-404A refrigerant, and have a lock-out high pressure limiting device. Under severe overloading conditions, in the event of a condenser fan failure or a plugged or blocked condenser, this device may shut down the refrigeration system. See page 17 for part number information if a replacement is required.

CONTROL SETTINGS: 500 CR & OR

Pressure Control

The temperature is controlled by an adjustable pressure control located in the machine compartment. An adjustable control has the word **COLDER** near the knob, with an arrow to indicate the adjustment direction. These controls are field adjustable and do not require a service agent. If you have any questions, feel free to contact the Delfield Service Department.


The refrigeration systems on self-contained CR & OR models were adjusted at the factory to maintain between 36°F and 40°F. No adjustment should be necessary. If adjustment does become needed however, the factory recommended settings are:

Low-pressure settings (CR models): 82 psi cut-in, 47 psi cut-out, 35 psi differential.

Low-pressure settings (OR models): 82 psi cut-in, 40 psi cut-out, 42 psi differential.

Operating pressures: High, 170 to 200 psi. Low, 30 to 37 psi.

In attempting to adjust the pressure control, you can do damage to your unit by accidentally adjusting the differential. Please make small incremental adjustments if a temperature adjustment is necessary, please contact the service department at Delfield (800) 733-8829 #1, or your local service agent. Delfield is not responsible for charges incurred while having the pressure control adjusted.

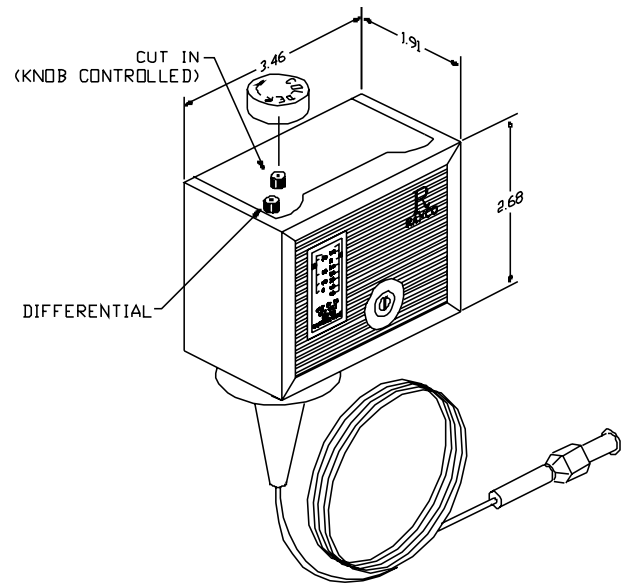

INSTALLATION: 500 CH



Installation should be done by personnel certified and licensed to install and maintain electrical appliances.

Location

Be sure the location chosen has a floor strong enough to support the total weight of the cabinet and contents. Contents fully loaded into this product line can weigh as much as 1500 lbs. Reinforce the floor as necessary to provide for maximum loading.

Leveling

A level cabinet looks better and will perform better because the drain pan will drain properly, the doors will line up with the frames properly, and the cabinet will not be subject to undue strain.

Electrical connection



Connections must be made in accordance with all applicable local codes and/or the National Electrical Code. Refer to the wiring diagrams on pages 6 and 7.

OPERATION: 500 CH

NOTE: Intended for DRY OPERATION ONLY.

Before the unit is used the first time for serving, turn the temperature knob to "10" and heat the well for 20 minutes. Do not be alarmed if smoke appears; this preheat should burn off any residue or dust on the heating element.



Hot surfaces can cause serious burns. Always wear some type of protective covering on your hands and arms when removing lids or pans from the unit.

Never place food directly into the well. Always use pans. Always place covers on pans when not serving to prevent food from drying out and to reduce your operating cost.

For most efficient operation, keep covered insets empty in each well during preheating and when the well is not in use.

Dry operation



- 1) Pre-heat the well on "HIGH" for approximately 15 minutes.
- 2) After pre-heating, set the control to your desired serving temperature.

Only 6" (15.2cm) deep insets should be used with a dry food well. When operated dry, the bottom of the food well will discolor. Refer to cleaning instructions to remove discoloration.

Temperature

Product in pans 140°F to 160°F

CLEANING: ALL MODELS

Clean the food wells daily. Wash with non-abrasive cleanser and non-abrasive pad. If necessary, a mild abrasive may be used. Do not use steel wool.

For all stainless steel parts, use mild, non-abrasive soap or detergent and warm water. This may be followed by an application of stainless steel cleaner or polish which will eliminate water spotting and fingerprints and will bring out the finish of the stainless steel.

Do not use a hose or pressure wash on these units. The water will damage the electrical components.





Cleaning the condenser (refrigerated units)

In order to maintain proper refrigeration, the condenser fins must be cleaned of dust, dirt and grease every three months. If condenser is totally blocked after three months increase cleaning frequency. Clean the condenser with a vacuum cleaner or stiff brush. If extremely dirty, use a commercially available condenser cleaner.


Cleaning the sliding door assembly

All Delfield 500 Series display cases feature a Pike sliding door assembly. Regular cleaning of door tracks with mild soap and water will keep them free of foreign matter insuring many years of use. The glass may be cleaned with a glass cleaner.

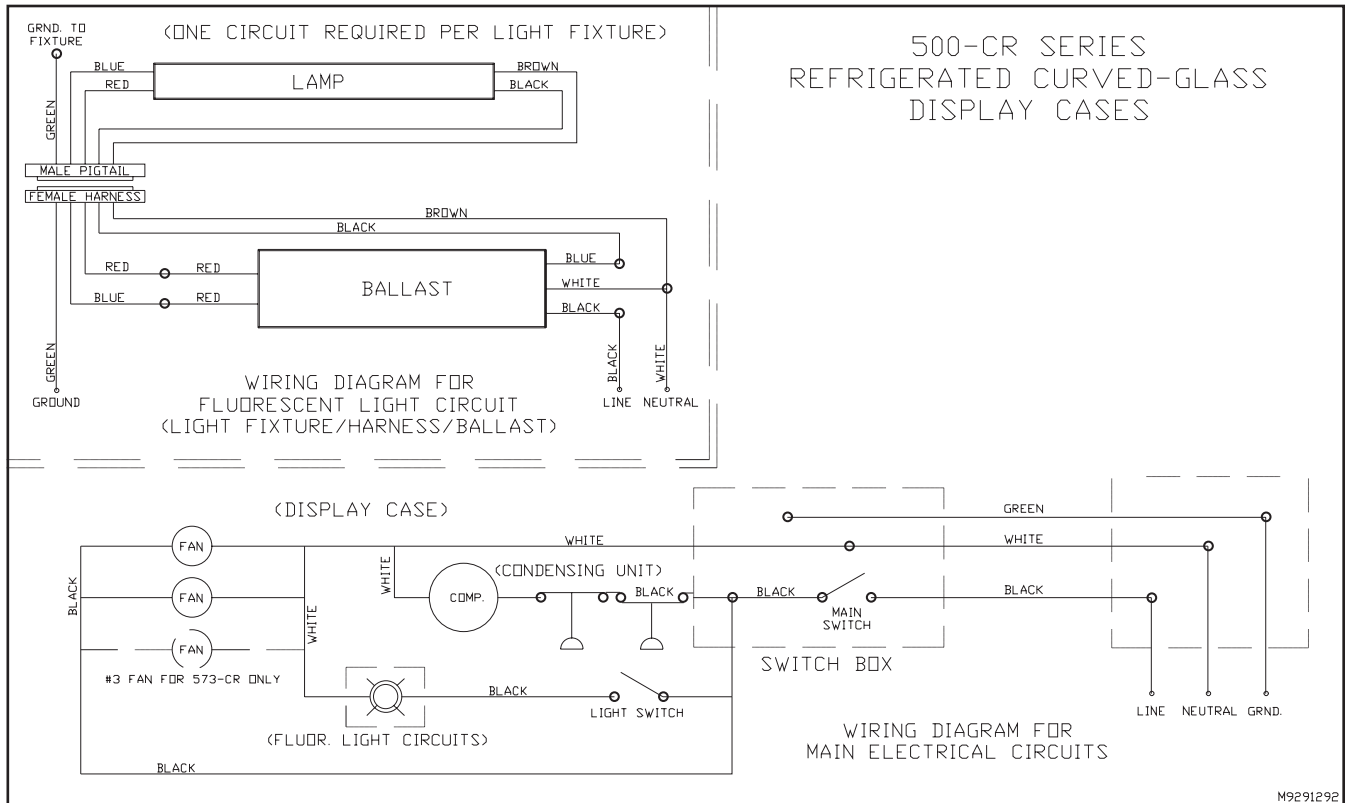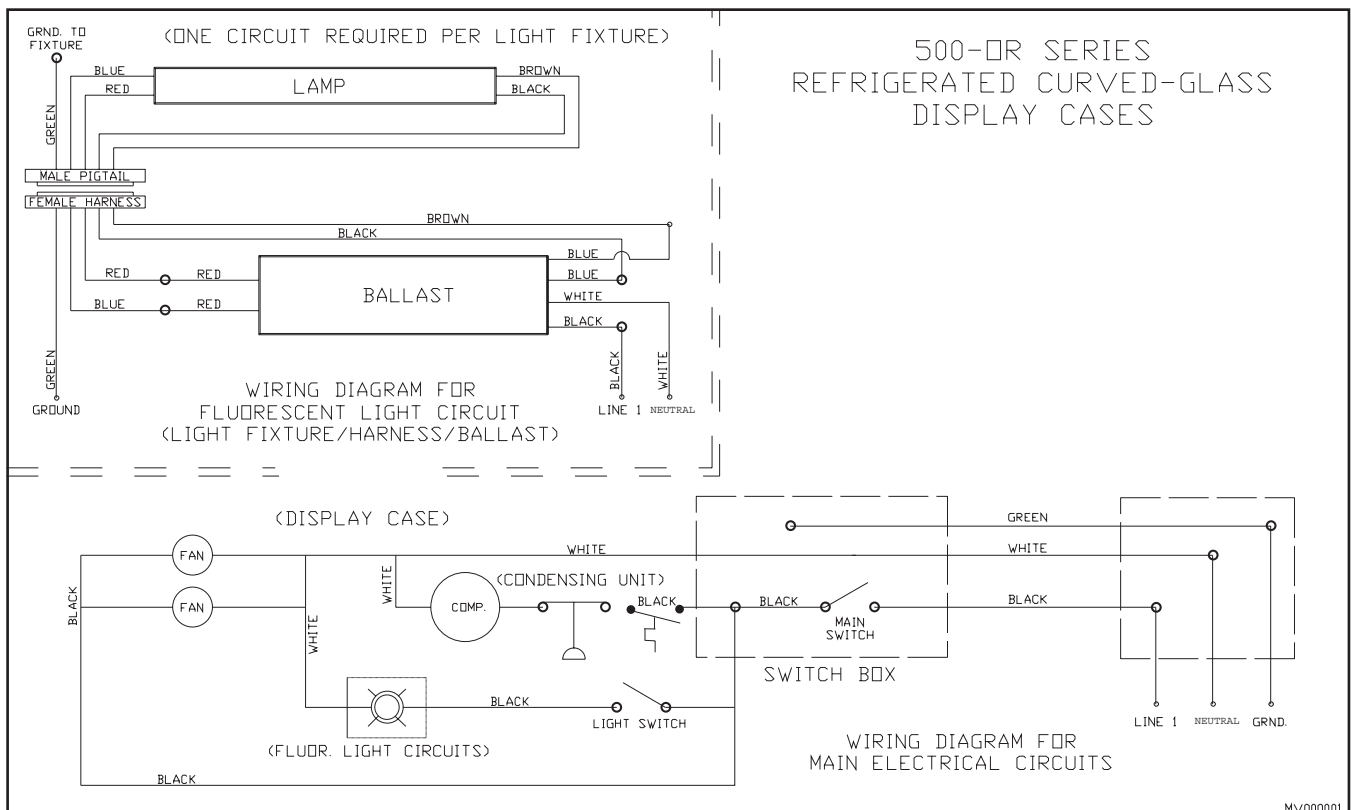
WIRING: 500 CR**WIRING: 500 OR**



WIRING: 500 CH

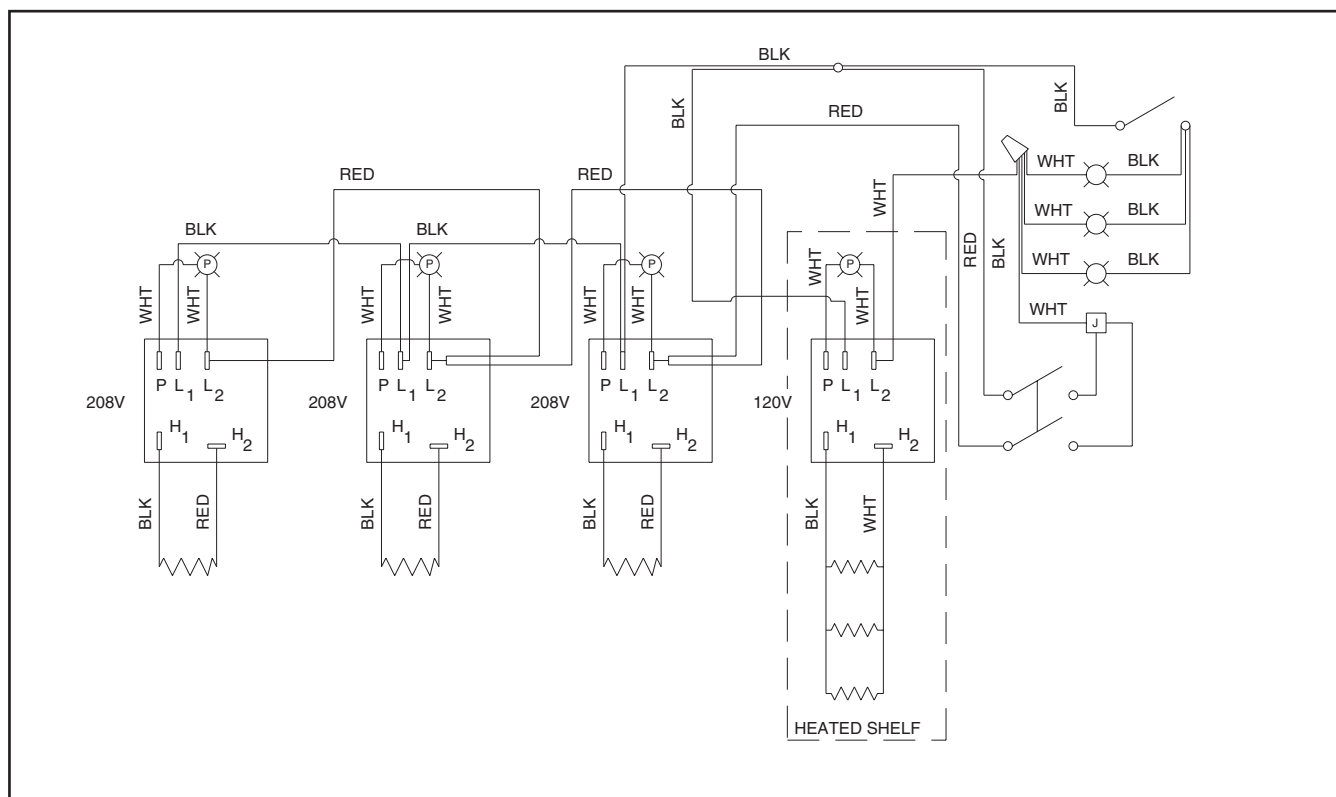


REPLACEMENT PARTS LIST FOR 537-CD

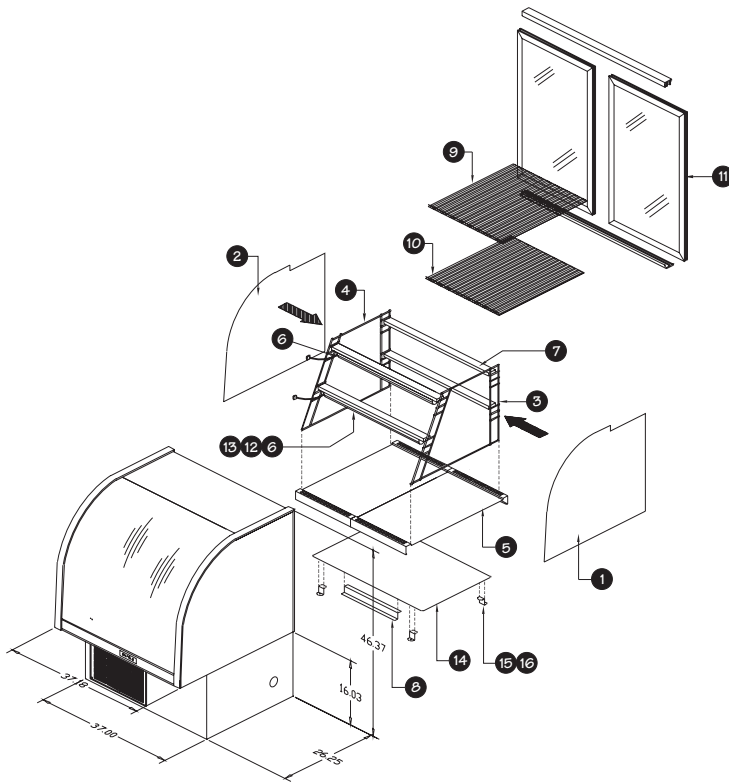

| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|-----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH, 500-CD |
| 2 | 1 | 001-3134 | mirror, acrylic, LH, 500-CD |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | 001-5285 | diffuser, air 537-CD/CR |
| 6 | 2 | XMK00127 | fixture, floor light, 24 remote |
| 7 | 4 | 001-5407 | support, shelf, 537-CD/CR |
| 8 | 2 | 001-5026 | clip, air diffuser, 537-CD |
| 9 | 1 | 397-8137 | shelf, adjustable, 21" x 33" |
| 10 | 1 | 397-8138 | shelf, adjustable, 26" x 33" |
| 11 | 1 | 323-7490 | door set, with lock, 537-CD/CR |
| 12 | 4 | 932-1095 | stud, threaded, s/s, 1/4-20 x .75 |
| 13 | 4 | 932-1401 | nut, 1/4-20, locking |

Please Note: Items not shown on exploded view are listed on page 17.
Door locks #323-3986 & door keys #323-3988


REPLACEMENT PARTS LIST FOR 549-CD

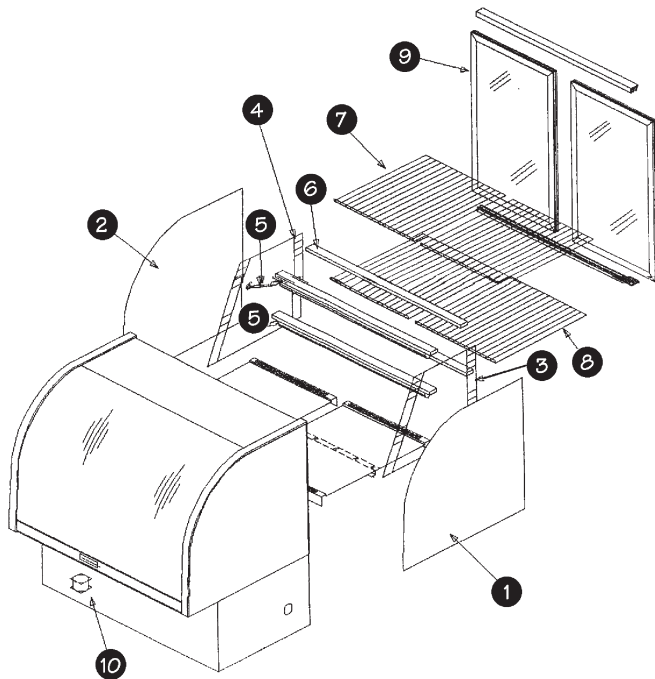

| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|---------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH, 500-CD |
| 2 | 1 | 001-3134 | mirror, acrylic, LH, 500-CD |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00128 | fixture, floor light, 36 remote |
| 6 | 4 | 001-5235 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4697 | door assembly, with lock |
| 10 | 1 | 216-2677 | fan, axial |

Please Note: Items not shown on exploded view are listed on page 17.
Door locks #323-3986 & door keys #323-3988


REPLACEMENT PARTS LIST FOR 561-CD

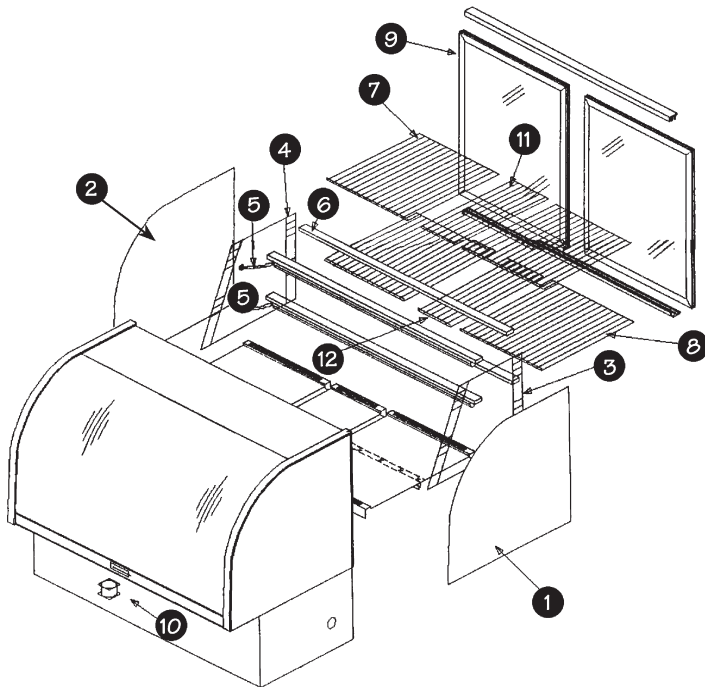

| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH, 500-CD |
| 2 | 1 | 001-3134 | mirror, acrylic, LH, 500-CD |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00129 | fixture, flour. light, 48 remote |
| 6 | 4 | 001-5277 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4698 | door assembly, PIKE, with lock |
| 10 | 1 | 216-2677 | fan, axial |
| 11 | 1 | 397-8125 | shelf, top center |
| 12 | 1 | 397-8126 | shelf, bottom center |

Please Note: Items not shown on exploded view are listed on page 17.
Door locks #323-3986 & door keys #323-3988


REPLACEMENT PARTS LIST FOR 573-CD

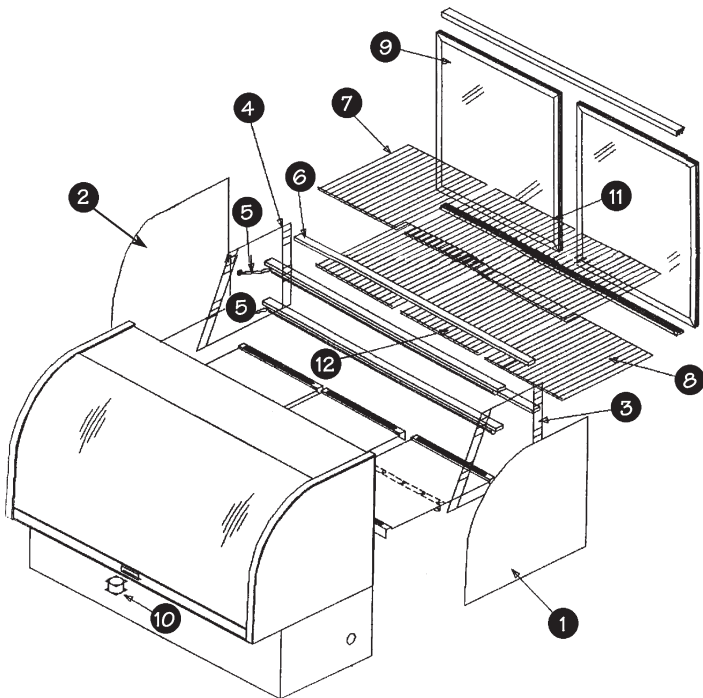

| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH, 500-CD |
| 2 | 1 | 001-3134 | mirror, acrylic, LH, 500-CD |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00130 | fixture, flour. light, 60 remote |
| 6 | 4 | 001-5295 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4699 | door assembly, PIKE, with lock |
| 10 | 1 | 216-2677 | fan, axial |
| 11 | 1 | 397-8127 | shelf, top center |
| 12 | 1 | 397-8128 | shelf, bottom center |

Please Note: Items not shown on exploded view are listed on page 17.
Door locks #323-3986 & Pike door keys #323-3988

REPLACEMENT PARTS LIST FOR 537CR/CRR

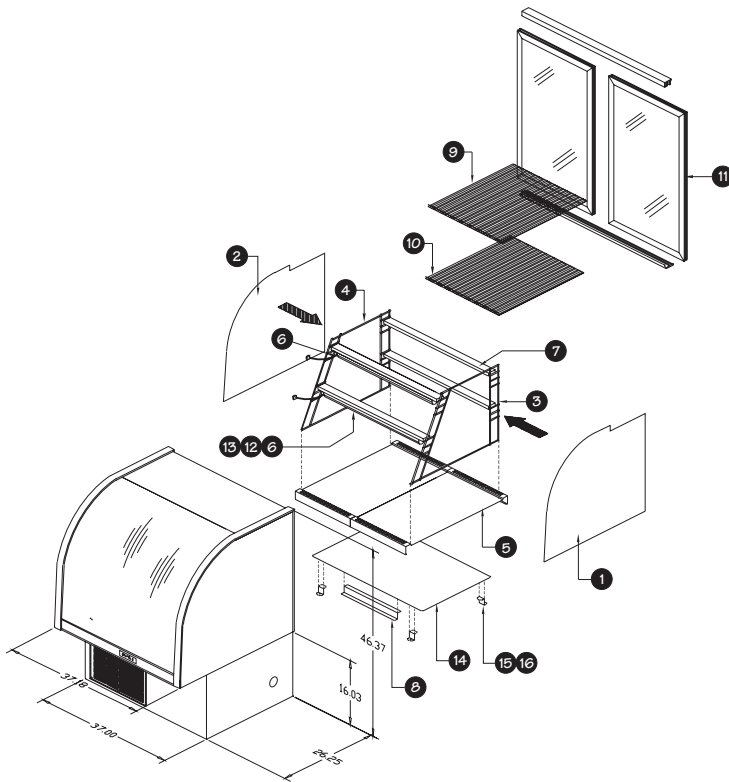


| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|-----------------------------------|
| 1 | 1 | 001-3131 | mirror, acrylic, RH, 500-CR |
| 2 | 1 | 001-3132 | mirror, acrylic, LH, 500-CR |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | 001-5285 | diffuser, air 537-CD/CR |
| 6 | 2 | XMK00127 | fixture, flour. light, 24 remote |
| 7 | 4 | 001-5407 | support, shelf, 537-CD/CR |
| 8 | 1 | 001-5407 | divider, air flow, 537-CR |
| 9 | 1 | 397-8137 | shelf, adjustable, 21" x 33" |
| 10 | 1 | 397-8138 | shelf, adjustable, 26" x 33" |
| 11 | 1 | 323-7490 | door set, with lock, 537-CD/CR |
| 12 | 4 | 932-1095 | stud, threaded, s/s, 1/4-20 x .75 |
| 13 | 4 | 932-1401 | nut, 1/4-20, locking |
| 14 | 1 | 001-5422 | cover, coil, 537-CR |
| 15 | 4 | 001-5252 | clip, holding, coil cover |
| 16 | 4 | 932-1238 | screw, #8 x .75, H/N-P-TR-A |

Please Note: Items not shown on exploded view are listed on page 17.

Door locks #323-3986 & door keys #323-3988

REPLACEMENT PARTS LIST FOR 549-CR/CRR

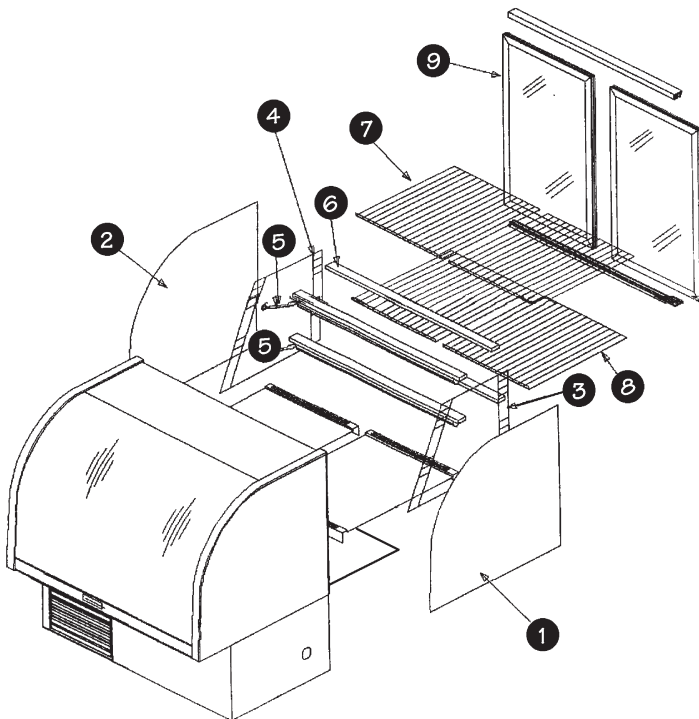


| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH |
| 2 | 1 | 001-3132 | mirror, acrylic, LH |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00128 | fixture, flour. light, 36 remote |
| 6 | 4 | 001-5235 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4697 | door assembly, with lock |

Please Note: Items not shown on exploded view are listed on page 17.

Door locks #323-3986 & door keys #323-3988

REPLACEMENT PARTS LIST FOR 561-CR/CRR

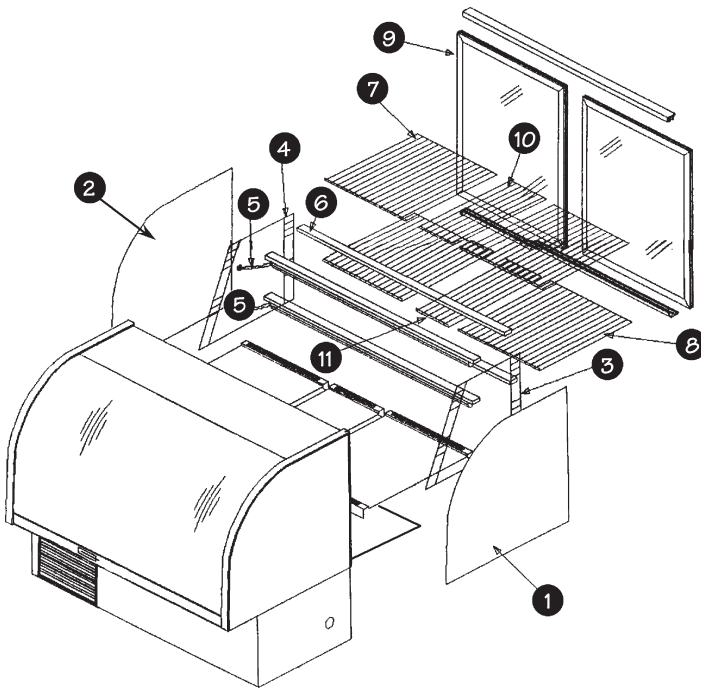


| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH |
| 2 | 1 | 001-3132 | mirror, acrylic, LH |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00129 | fixture, flour. light, 48 remote |
| 6 | 4 | 001-5277 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4698 | door assembly, PIKE, with lock |
| 10 | 1 | 397-8125 | shelf, top center |
| 11 | 1 | 397-8126 | shelf, bottom center |

Please Note: Items not shown on exploded view are listed on page 17.

Door locks #323-3986 & door keys #323-3988

REPLACEMENT PARTS LIST FOR 573-CR/CRR

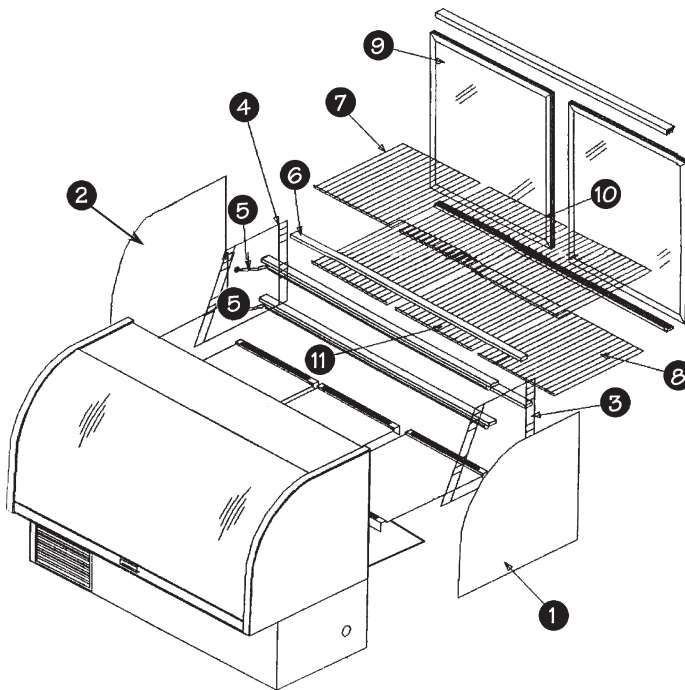


| KEY | QUANTITY | DELFIELD PART# | DESCRIPTION |
|-----|----------|----------------|----------------------------------|
| 1 | 1 | 001-3133 | mirror, acrylic, RH |
| 2 | 1 | 001-3132 | mirror, acrylic, LH |
| 3 | 1 | 397-8121 | holder, adj. shelf, RH |
| 4 | 1 | 397-8120 | holder, adj. shelf, LH |
| 5 | 2 | XMK00130 | fixture, flour. light, 60 remote |
| 6 | 4 | 001-5295 | shelf support |
| 7 | 2 | 397-8122 | shelf, top |
| 8 | 2 | 397-8123 | shelf, bottom |
| 9 | 1 | 323-4699 | door assembly, PIKE, with lock |
| 10 | 1 | 397-8127 | shelf, top center |
| 11 | 1 | 397-8128 | shelf, bottom center |

Please Note: Items not shown on exploded view are listed on page 17.


Door locks #323-3986 & door keys #323-3988

REPLACEMENT PARTS LIST FOR 549-CH

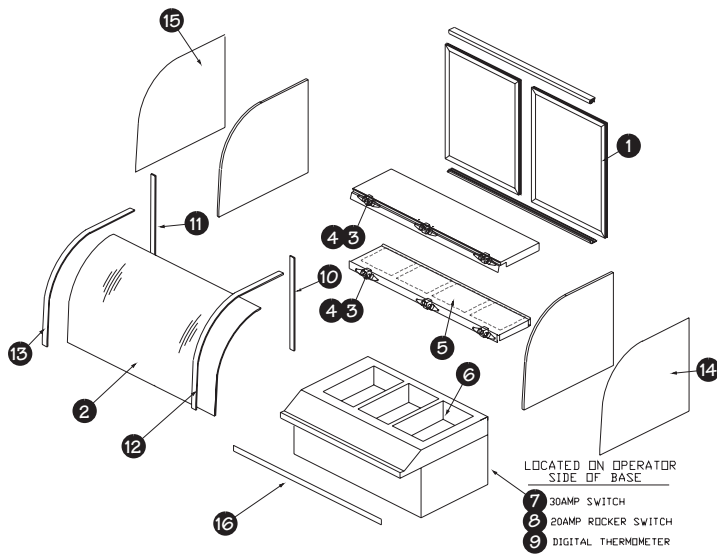


| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|--|
| 1 | 323-4055 | door set, 49" curved glass |
| 2 | 345-5439 | glass, curved, 1" insulated, 47" |
| 3 | 219-3959 | bulb, 25W, Teflon coated, clear |
| 4 | 219-3960 | lamp holder, twin-threaded |
| 5 | 219-3970 | heater, pad, 115V/90W |
| 6 | XMK00106 | warmer, food, 208V, no drain |
| 7 | 219-4212 | switch, 30A 120/277V |
| 8 | 219-0154 | switch, rocker, 20A/125V, 15A/250V |
| 9 | 351-6059 | thermometer, digital, solar/batt |
| 10 | 105-0183 | extrusion, polyethylene, blk, vertical, RH |
| 11 | 105-0173 | extrusion, polyethylene, blk, vertical, LH |
| 12 | 105-0184 | extrusion, polyethylene, blk, curved, RH |
| 13 | 105-0174 | extrusion, polyethylene, blk, curved, LH |
| 14 | 001-5414 | trim, side, exterior, RH |
| 15 | 001-5415 | trim, side, exterior, LH |
| 16 | 001-6855 | trim, front, laminate |

REPLACEMENT PARTS LIST FOR 561-CH

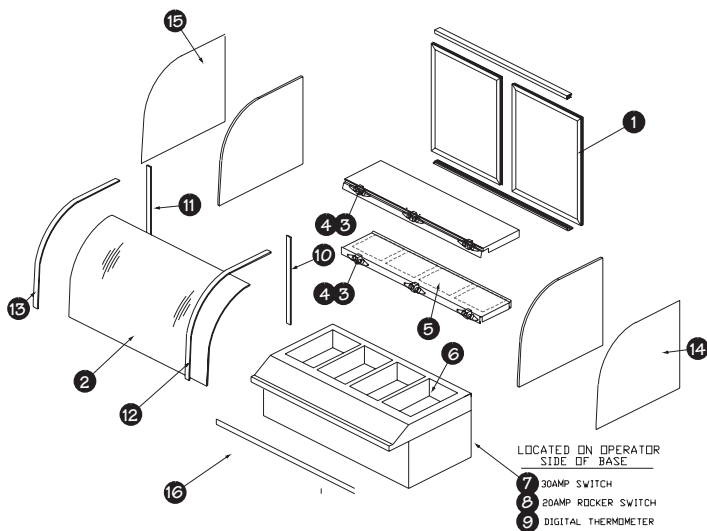


| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|--|
| 1 | 323-4068 | door set, 61" curved glass |
| 2 | 345-5441 | glass, curved, 1" insulated, 59" |
| 3 | 219-3959 | bulb, 25W, Teflon coated, clear |
| 4 | 219-3960 | lamp holder, twin-threaded |
| 5 | 219-3970 | heater, pad, 115V/90W |
| 6 | XMK00106 | warmer, food, 208V, no drain |
| 7 | 219-4212 | switch, 30A 120/277V |
| 8 | 219-0154 | switch, rocker, 20A/125V, 15A/250V |
| 9 | 351-6059 | thermometer, digital, solar/batt |
| 10 | 105-0183 | extrusion, polyethylene, blk, vertical, RH |
| 11 | 105-0173 | extrusion, polyethylene, blk, vertical, LH |
| 12 | 105-0184 | extrusion, polyethylene, blk, curved, RH |
| 13 | 105-0174 | extrusion, polyethylene, blk, curved, LH |
| 14 | 001-5414 | trim, side, exterior, RH |
| 15 | 001-5415 | trim, side, exterior, LH |
| 16 | 001-6866 | trim, front, laminate |

REPLACEMENT PARTS LIST FOR 573-CH

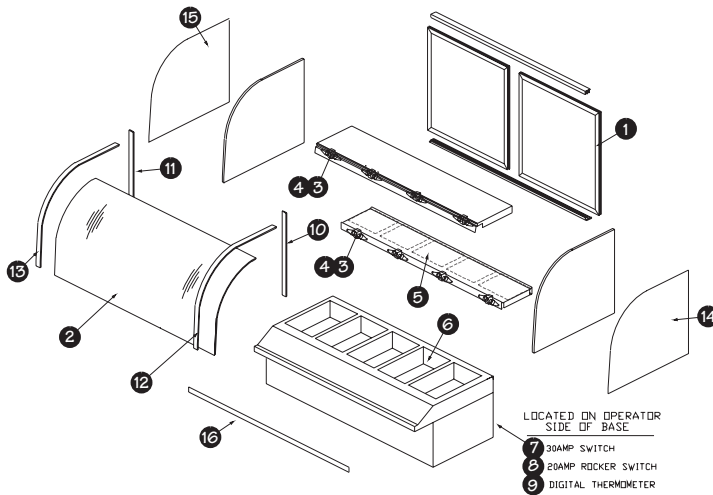


| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|--|
| 1 | 323-4069 | door set, 73" curved glass |
| 2 | 345-5443 | glass, curved, 1" insulated, 71" |
| 3 | 219-3959 | bulb, 25W, Teflon coated, clear |
| 4 | 219-3960 | lamp holder, twin-threaded |
| 5 | 219-3970 | heater, pad, 115V/90W |
| 6 | XMK00106 | warmer, food, 208V, no drain |
| 7 | 219-4212 | switch, 30A 120/277V |
| 8 | 219-0154 | switch, rocker, 20A/125V, 15A/250V |
| 9 | 351-6059 | thermometer, digital, solar/batt |
| 10 | 105-0183 | extrusion, polyethylene, blk, vertical, RH |
| 11 | 105-0173 | extrusion, polyethylene, blk, vertical, LH |
| 12 | 105-0184 | extrusion, polyethylene, blk, curved, RH |
| 13 | 105-0174 | extrusion, polyethylene, blk, curved, LH |
| 14 | 001-5414 | trim, side, exterior, RH |
| 15 | 001-5415 | trim, side, exterior, LH |
| 16 | 001-6867 | trim, front, laminate |

REPLACEMENT PARTS LIST FOR 549-OR

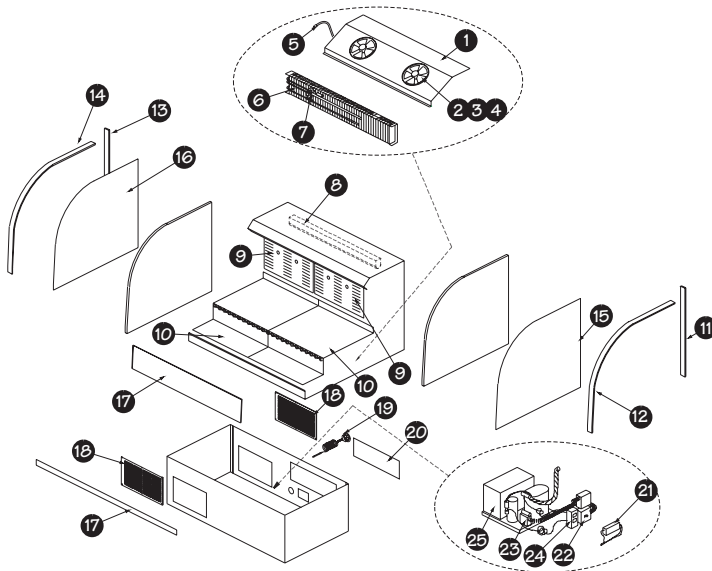

| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|--|
| 1 | 001-5558 | baffle, fan 49" |
| 2 | 216-2667 | motor, fan, morrill |
| 3 | 351-6075 | blade, fan, 7" dia., aluminum |
| 4 | 397-8070 | bracket, fan motor |
| 5 | 218-2414 | harness, fan motor, 78" |
| 6 | 351-6097 | coil, evaporator, custom, 49" |
| 7 | 351-6273 | valve, expansion, 1/4, HI, 404A |
| 8 | XMK-00132 | fixture, fluorescent light, 36" |
| 9 | 001-5554 | back, interior, louvered |
| 10 | 001-5555 | diffuser, air, LH & RH |
| 11 | 105-0183 | extrusion, polyethylene, blk, vert, RH |
| 12 | 105-0173 | extrusion, polyethylene, blk, vert, LH |
| 13 | 105-0184 | extrusion, polyethylene, blk, curved, RH |
| 14 | 105-0174 | extrusion, polyethylene, blk, curved, LH |
| 15 | 001-5414 | trim, side, exterior, RH |
| 16 | 001-5415 | trim, side, exterior LH |
| 17 | 001-6855 | trim, front, laminate, 549 |
| 18 | 001-5278 | louvers, s/s, 15 x 17 |
| 19 | 351-6038 | thermometer, dial |
| 20 | 001-5243 | panel, access |
| 21 | 219-3903 | ballast, rapid start, 36" lamp |
| 22 | 219-3919 | switch, 15A/120V |
| 23 | 351-6247 | control, pressure, high |
| 24 | 509-0025 | control, temperature, -30-100 |
| 25 | 352-6731 | condensing unit, 1/2 hp, R-404A, med |

FLUORESCENT LIGHT

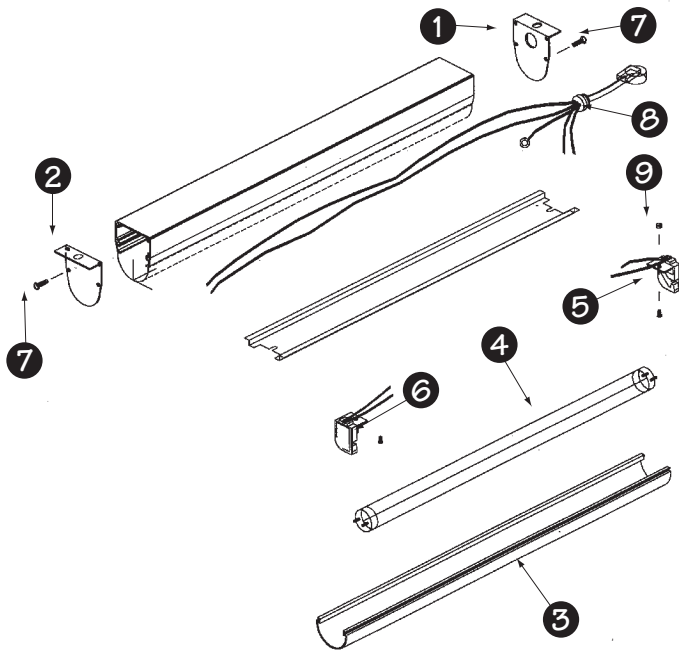


| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|-----------------------------------|
| 1 | SMK00571 | cap, end, top mtg, pigtail, -rem. |
| 2 | SMK00572 | cap, end, top mtg, blank, -rem. |
| 3 | 170-1045 | diffuser, fluor. light, 24" |
| | 170-1046 | diffuser, fluor. light, 36" |
| | 170-1047 | diffuser, fluor. light, 48" |
| | 170-1054 | diffuser, fluor. light, 60" |
| 4 | 219-3906 | lamp, fluorescent, 24" |
| | 219-3907 | lamp, fluorescent, 36" |
| | 219-3908 | lamp, fluorescent, 48" |
| | 219-3909 | lamp, fluorescent, 60" |
| 5 | 219-3939 | lamp holder, left |
| 6 | 219-3940 | lamp holder, right |
| 7 | 932-1266 | screw, #8-32 x .50 |
| 8 | 218-3613 | pigtail, male, 3.5", rem. ballast |
| | 218-3595 | pigtail, male, 9", rem. ballast |
| 9 | 932-1010 | nut, hex, starlock, s/s, #6-32 |

*Refer to the exploded view of unit for a complete assembly part number


Door Assembly

| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|---------------------------------------|
| | 323-7490 | complete assembly, 537-CD/CR/CRR |
| | 323-4697 | complete assembly, 549-CD/CR/CRR |
| | 323-4055 | complete assembly, 549-CH |
| | 323-4698 | complete assembly, 561-CD |
| | 323-4699 | complete assembly, 573-CD |
| 1 | 323-4636 | single roller, 537, 549 & 561 |
| | 323-4637 | double roller, 573 |
| 2 | order by size | bumper gasket, 241/8 & 537 |
| | 323-3936 | bumper gasket, 245/32, 549, 561 & 573 |
| 3 | order by size | wiper gasket, 537 |
| | 323-3936 | wiper gasket, 2223/32, 549, 561 & 573 |
| 4 | 323-3947 | spring 12", green, 537 |
| | 323-3949 | spring 12", 549 |
| | 323-3945 | spring 23", gold, 561 |
| | 323-3946 | spring 30", gold, 573 |
| 5 | order by size | bottom track, 34 3/16, 537, black |
| | 323-3904 | bottom track, 46 3/16, 549, black |
| | order by size | bottom track, 46 3/16, 549-CH, black |
| | 323-3909 | bottom track, 58 3/16, 561, black |
| | 323-3912 | bottom track, 70 3/16, 573, black |
| 6 | order by size | top track, 34 3/16, 537, black |
| | 323-3904 | top track, 46 3/16, 549, black |
| | 323-3922 | top track, 58 3/16, 561 |
| | order by size | Alum. top track, 46 3/16, 549-CH |
| | 323-3925 | top track, 70 3/16, 573 |

Please Note: Gaskets & tracks order by dimensions • Plastic door glides order by description reference #323-4055, 549-CH

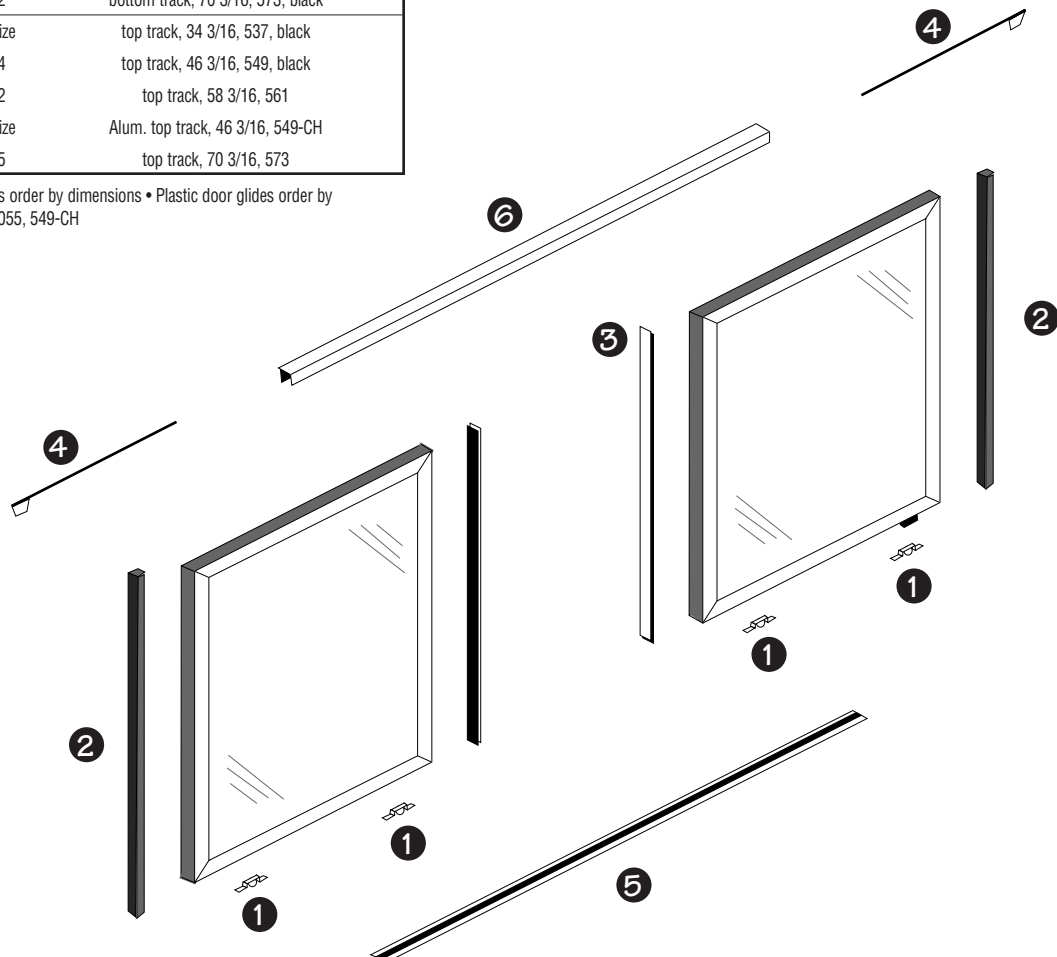


COMPRESSOR/COIL ASSEMBLY 537/549/561-CR/CRR

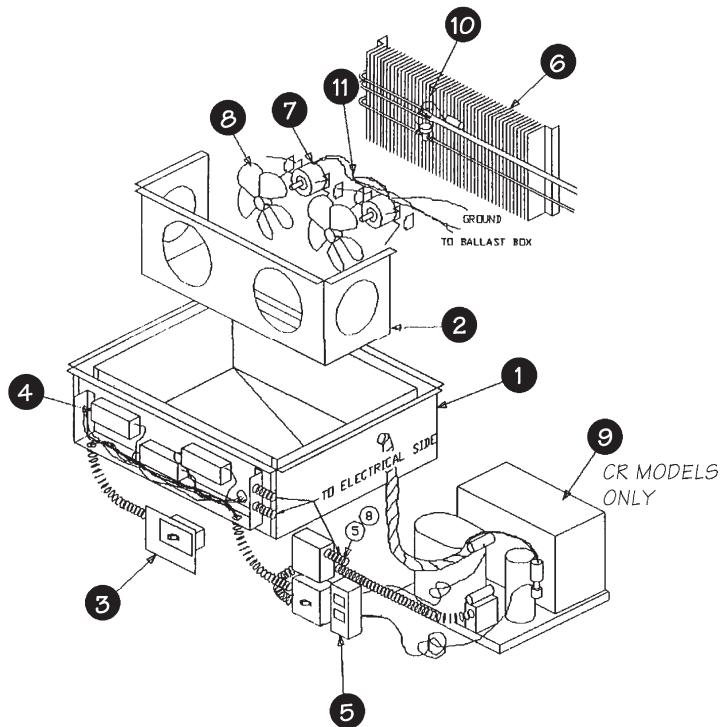

| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|---|
| 1 | 010-1916 | coil pan assembly |
| 2 | 001-5251 | bracket, fan mounting |
| | 001-5417 | bracket, fan mounting (537-CR) |
| 3 | 219-3919 | switch, toggle, SPST |
| 4 | 219-3903 | ballast, rapid start (549 & 537-CR) |
| | 219-3904 | ballast, rapid start (561) |
| 5 | 219-3942 | control, SPST |
| | 219-3927 | control, SPST (537-CR) |
| 6 | 351-6231 | evaporator coil, 404A |
| | 351-6072 | evaporator coil, 404A (537-CR) |
| 7 | 216-2667 | motor, fan, 1450 rpm, CW (537, 549 & 561) |
| 8 | 351-6184 | blade, fan, 7" plastic, CW |
| 9 | 352-6729 | condensing unit, 1/2 h.p., 404A (549-CR) |
| | 352-6746 | condensing unit, 1/3 h.p., 404A (537-CR) |
| | 352-6732 | condensing unit, 3/4 h.p., 404A (561-CR) |
| 10 | 351-6084 | valve, expansion, 1/2", 404A |
| 11 | 218-3445 | harness, evaporator fan |

COMPRESSOR/COIL ASSEMBLY 573-CR/CRR

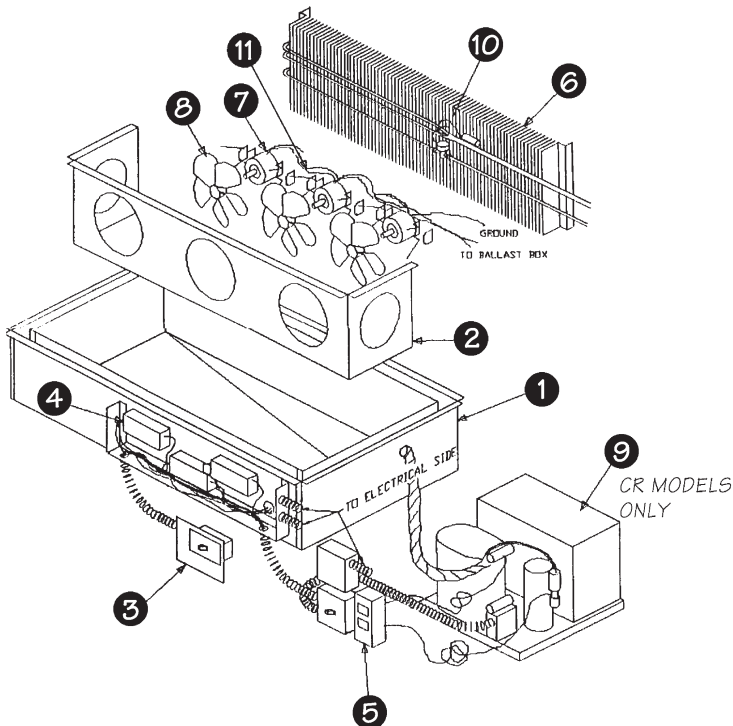

| KEY | DELFIELD PART# | DESCRIPTION |
|-----|----------------|---|
| 1 | 010-1926 | coil pan assembly |
| 2 | 001-5292 | bracket, fan mounting |
| 3 | 219-3919 | switch, toggle, SPST |
| 4 | 219-3905 | ballast, rapid start |
| 5 | 219-3942 | control, SPST |
| 6 | 351-6246 | evaporator coil, 404A |
| 7 | 216-2667 | motor, fan, 1450 rpm, CW |
| 8 | 351-6184 | blade, fan, 7" plastic, CW |
| 9 | 352-6732 | condensing unit, 3/4 h.p., 404A (573-CR only) |
| 10 | 351-6084 | valve, expansion, 1/2", 404A |
| 11 | 218-3445 | harness, evaporator fan |

DELFIELD FOOD WELL (DFW) ASSEMBLY: WITH INFINITE CONTROL


For 500-CH Heated Units

| KEY | DELFIELD PART# | DESCRIPTION |
|-----|-------------------|---------------------------------------|
| | XMK00106 | Complete assembly, infinite w/o drain |
| 1 | GMK00061 | Deflector plate |
| 2 | GMK00062 | Bottom cover |
| 3 | 016-0014 | Food well, with drain |
| 4 | 932-1353 | Screw |
| 5 | 219-4007 | Element |
| 6 | 932-1379 | Screws (2) |
| 7 | 343-4663 | Insulation |
| 8 | 219-4335 | Thermostat non-adjustable |
| 9 | 932-1007 | Screw |
| 10 | GMK00063 | Drain cover |
| 11 | 932-1007 | Screws (2) |
| 12 | 219-4110 | Infinite control, 240V |
| 13 | 323-4557 | Infinite control knob |
| 14 | 219-4095 | Pilot light, amber |

NOTE: If you need four or more component parts, you must buy a complete assembly.



INFINITE
CONTROL
KNOB

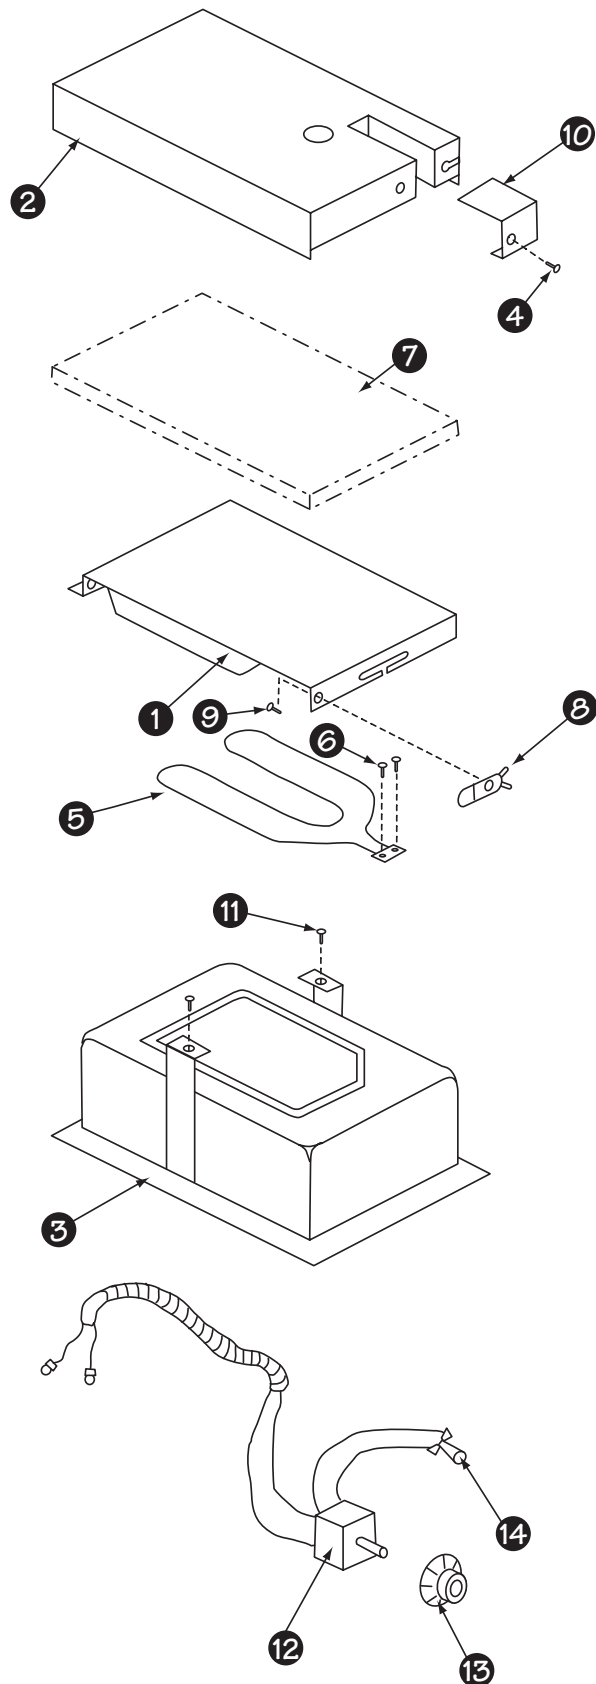

REPLACEMENT PARTS LIST — NOT SHOWN ON EXPLODED VIEWS

| DELFIELD PART# | DESCRIPTION |
|---|--------------------|
| CR & CRR MODELS (MISC. PARTS) | |
| Harness, wiring-female, 84" | 218-3596 |
| Glass, curved, 1", insulated, 35" (537) | 345-5319 |
| Glass, curved, 1", insulated, 47" (549) | 345-5439 |
| Glass, curved, 1", insulated, 59" (561) | 345-5441 |
| Glass, curved, 1", insulated, 71" (573) | 345-5443 |
| Foot, leveler, adj., 1/2-13 | 323-4696 |
| Fixture, fluorescent light, 24" remote, top light (537) | .XMK00131 |
| Fixture, fluorescent light, 36" remote, top light (549) | .XMK00132 |
| Fixture, fluorescent light, 48" remote, top light (561) | .XMK00133 |
| Fixture, fluorescent light, 60" remote, top light (573) | .XMK00134 |
| Louver, s/s, 15 x 17 | 001-5278 |
| Louver, s/s, 15 x 23 | 001-5279 |
| Harness, light/fan motor, 78" | 218-3414 |
| Switch, 15A/120V, SPST, ivory | 219-3919 |
| Holder, adj. shelf, beige, RH | 397-8121 |
| Holder, adj. shelf, beige, LH | 397-8120 |
| Control, pressure, dual | 219-3942 |
| Bracket, fan motor | 397-8070 |
| Blade, fan, 7" dia., Lexan, clear | 351-6184 |
| Harness, evaporator fan | 218-3445 |
| Support, shelf, (549-CR) | 001-5235 |
| Shelf, top/end, adj., 21 x 22.5 | 397-8122 |
| Shelf, bottom/end, adj., 26 x 22.5 | 397-8123 |
| Door set, 49" disp. case, with lock | 323-4697 |
| Door set, 61" disp. case, with lock | 323-4698 |
| Shelf, top/center, adj., 21 x 12 | 397-8125 |
| Shelf, bottom/center, adj., 26 x 12 | 397-8126 |

CD MODELS (MISC. PARTS)

| | |
|---|-----------|
| Harness, wiring-female, 84" | 218-3596 |
| Glass, curved, .25", insulated, 35" (537) | 345-5400 |
| Glass, curved, .25", insulated, 47" (549) | 345-5440 |
| Glass, curved, .25", insulated, 59" (561) | 345-5442 |
| Glass, curved, .25", insulated, 71" (573) | 345-5444 |
| Fixture, fluorescent light, 24" remote, top light (537) | .XMK00131 |
| Fixture, fluorescent light, 36" remote, top light (549) | .XMK00132 |
| Fixture, fluorescent light, 48" remote, top light (561) | .XMK00133 |
| Fixture, fluorescent light, 60" remote, top light (573) | .XMK00134 |
| Foot, leveler, adj., 1/2-13 | 323-4696 |
| Switch, 15A/120V, (2) SPST, ivory | 219-3918 |
| Holder, adj. shelf, beige, RH | 397-8121 |
| Holder, adj. shelf, beige, LH | 397-8120 |
| Pigtail, male, 9", rem. ballast | 218-3595 |
| Support, shelf, (549) | 001-5235 |
| Shelf, bottom/end, adj., 21 x 22.5 (549 & 561) | 397-8122 |
| Shelf, adjustable, 21 x 33 (537) | 397-8137 |
| Shelf, top, center, adj. 21 x 24 (573) | 397-8127 |
| Shelf, bottom/end, adj., 26 x 22.5 (549 & 561) | 397-8123 |
| Shelf, adjustable, 26 x 33 (537) | 397-8138 |
| Shelf, bottom, center, adj. 26 x 24 (573) | 397-8128 |

| DELFIELD PART# | DESCRIPTION |
|---------------------------------------|--------------------|
| OR MODELS (MISC. PARTS) | |
| Motor, evaporator | 216-2667 |
| Blade, fan, 7" dia., CW, 20 deg, alum | 351-6075 |
| Harness, light/fan motor, 78" | 218-3414 |
| Coil, evap., customer, 49" | 351-6097 |
| Cond. unit, 1/2 h.p., R-404A, med | 352-6731 |
| Control, temperature, -30-100%D | 509-0025 |
| Valve, Expansion, 1/4, R-404A | 351-6273 |
| Ballast, rapid start, 36" lamp | 219-3903 |
| Switch, 15A/120V, SPST, ivory | 219-3919 |
| Timer, 24 hours, clock face | 219-4345 |
| Harness, evaporator fan | 218-3445 |
| Bracket, fan motor | 397-8070 |
| Louver, s/s, 15 x 17 | 001-5278 |
| Shelf, Lexan, .5" x 10" x 45.5" | 354-5339 |
| Dial, Thermometer | 351-6038 |
| CH Models (misc. parts) | |
| Lamp holder, twin-threaded | 219-3960 |
| Bulb, 25W, Teflon coating, clear | 219-3959 |
| Heater, pad, 115V/90W | 219-3970 |
| Thermostat, nonadjustable, 480°F | 219-4335 |
| Thermometer/digital, solar/batt | 351-6059 |
| Switch, rocker, 20A/125V, 15A/250V | 219-0154 |
| Switch, 30A, 120/277V | 219-4212 |

BALLASTS

| | |
|--------------------|---------------|
| 120V ballast (537) | 219-3902 |
| 120V ballast (549) | 219-3903 |
| 120V ballast (561) | 219-3904 |
| 120V ballast (573) | 219-3905 |
| 220V ballast | special order |



STANDARD LABOR GUIDELINES TO REPAIR OR REPLACE PARTS ON DELFIELD EQUIPMENT

Advice and recommendations given by Delfield Service Technicians do not constitute or guarantee any special coverage.

- A maximum of 1-hour is allowed to **diagnose a defective component**.
- A maximum of 1-hour is allowed for **retrieval of parts** not in stock.
- A maximum **travel distance** of 100 miles round trip and 2-hours will be reimbursed.
- Overtime, installation/start-up, normal control adjustments, general maintenance, glass breakage, freight damage, and/or correcting and end-user installation error will not be reimbursed under warranty unless pre-approved with a **Service Work Authorization** from Delfield. You must submit the number with the service claim.

LABOR OF 1-HOUR IS ALLOWED TO REPLACE:

- Thermostat
- Infinite Switch
- Door Jamb Switch
- Solenoid Coil
- Hi-limit/Thermal Protector Switch
- Fan Delay/Defrost Termination Switch
- Compressor Start Components and Overload Protector
- Defrost Timer
- Thermometer
- Gear Box
- Contactor/Relay
- Transformer
- Evaporator/Condenser Fan Motor and Blade
- Circulating Fan Motor and Blade
- Microprocessor Control
- Water Level Sensor/Probe
- Door Hinges, Locks, and Gaskets
- Condensate Element
- Springs/Lowerator

LABOR OF 2 HOURS TO REPLACE:

- Drawer Tracks/Cartridges
- Pressure Control
- Solenoid Valve
- Defrost Element
- Heating Element
- Locate/Repair Leak

LABOR OF 3 HOURS TO REPLACE:

- EPR or CPR Valve
- Expansion Valve
- Condenser or Evaporator Coil

LABOR OF 4 HOURS TO REPLACE

- Compressor

This includes recovery of refrigerant and leak check.

\$35.00 maximum reimbursement for refrigerant recovery (includes recovery machine, pump, torch, oil, flux, minor fittings, solder, brazing rod, nitrogen, or similar fees.)

REFRIGERANTS

- R22 A maximum of \$4.00/lb. or 25¢/oz. will be reimbursed.
- R134A A maximum of \$5.00/lb. or 31¢/oz. will be reimbursed.
- R404A A maximum of \$12.00/lb. or 75¢/oz. will be reimbursed.

STANDARD ONE YEAR WARRANTY (ONE YEAR PARTS, 90 DAYS LABOR.)

The Delfield Company ("Delfield") warrants to the Original Purchaser of the Delfield product (herein called the "Unit") that such Unit, and all parts thereof, will be free from defects in material and workmanship under normal use and service for a period of one (1) year from the date of shipment of the Unit to the Original Purchaser **or, if the Original Purchaser returns the warranty card completely filled out including the date of installation within thirty (30) days of receipt of the Unit, one (1) year from the date of installation.** During this one year warranty period, Delfield will repair or replace any defective part or portion thereof returned to Delfield by the Original Purchaser which Delfield determines was defective due to faulty material or workmanship. The Original purchaser will pay all labor, crating, freight and related costs incurred in the removal of the Unit of defective component and shipment to Delfield, except that during a period of either ninety (90) days from the date of shipment of the Unit to the Original Purchaser or, if the Original Purchaser returns the warranty card completely filled out including the date of installation within thirty (30) days of receipt of the Unit, ninety (90) days from the date of installation Delfield will pay all related labor costs. Delfield will pay the return costs if the Unit or part thereof was defective.

The term "Original Purchaser" as used herein means that person, firm, association, or corporation for whom the Unit was originally installed.

This warranty does not apply to any Unit or part thereof that has been subjected to misuse, neglect, alteration, or accident, such as accidental damage to the exterior finish, operated contrary to the recommendations specified by Delfield; or repaired or altered by anyone other than Delfield in any way so as to, in Delfield's sole judgement, affect its quality or efficiency. This warranty does not apply to any Unit that has been moved from the location where it was originally installed. This warranty also does not cover the refrigerator drier or the light bulbs used in the Unit. **The warranty is subject to the user's normal maintenance and care responsibility as set forth in the Service and Installation Manual, such as cleaning the condenser coil, and is in lieu of all other obligations of Delfield. Delfield neither assumes, nor authorizes any other person to assume for Delfield, any other liability in connection with Delfield's products.**

Removal or defacement of the original Serial Number or Model Number from any Unit shall be deemed to release Delfield from all obligations hereunder or any other obligations, express or implied.

Parts furnished by suppliers to Delfield are guaranteed by Delfield only to the extent of the original manufacturer's express warranty to Delfield. Failure of the Original Purchaser to receive such manufacturer's express warranty to Delfield. Failure of the Original Purchaser to receive such manufacturer's warranty shall in no way create any warranty, expressed or implied, or any other obligation or liability on Delfield's part in respect thereof.

IF THE CUSTOMER IS USING A PART THAT RESULTS IN A VOIDED WARRANTY AND A DELFIELD AUTHORIZED REPRESENTATIVE TRAVELS TO THE INSTALLATION ADDRESS TO PERFORM WARRANTY SERVICE, THE SERVICE REPRESENTATIVE WILL ADVISE CUSTOMER THE WARRANTY IS VOID. SUCH SERVICE CALLS WILL BE BILLED TO CUSTOMER AT THE AUTHORIZED SERVICE CENTER'S THEN APPLICABLE TIME AND MATERIALS RATES. CONSIDER: CUSTOMER MAY INITIATE A SERVICE AGREEMENT WITHOUT PARTS COVERAGE.

If shipment of a replacement part is requested prior to the arrival in the Delfield factory of the part claimed to be defective, the Original Purchaser must accept delivery of the replacement part of a C.O.D.

basis, with credit being issued after the part has been received and inspected at Delfield's plant and determined by Delfield to be within this warranty.

Under no condition does this warranty give the Original Purchaser the right to replace the defective Unit with a complete Unit of the same manufacturer or of another make. Unless authorized by Delfield in writing, this warranty does not permit the replacement of any part, including the motor-compressor, to be made with the part of another make or manufacturer.

No claims can be made under this warranty for spoilage of any products for any reason, including system failure.

The installation contractor shall be responsible for building access, entrance and field conditions to insure sufficient clearance to allow any hood(s), vent(s), or Unit(s) if necessary, to be brought into the building. Delfield will not be responsible for structural changes or damages incurred during installation of the Unit or any exhaust system.

Delfield shall not be liable in any manner for any default or delay in performance hereunder caused by or resulting from any contingency beyond Delfield's control, including, but not limited to, war, governmental restrictions or restraints, strike, lockouts, injunctions, fire, flood, acts of nature, short or reduced supply of raw materials, or discontinuance of the parts by the original part manufacturer.

Except as provided in any Additional Four Year Protection Plan, if applicable, and the Service Labor Contract, if applicable, the foregoing is exclusive and in lieu of all other warranties, whether written or oral, express or implied. This warranty supersedes and excludes any prior oral or written representations or warranties. Delfield expressly disclaims any implied warranties of merchantability, fitness for a particular purpose of compliance with any law, treaty, rule or regulation relating to the discharge of substances into the environment. The sole and exclusive remedies of any person relating to the Unit, and the full liability of Delfield for any breach of this warranty, will be as provided in this warranty.

Other than this Delfield Standard One Year Limited Warranty, any applicable Delfield Additional Four Year Protection Plan or applicable Delfield Service Labor Contract, the Original Purchaser agrees and acknowledges that no other warranties are offered or provided in connection with or for the unit or any other part thereof.

In no event will Delfield be liable for special, incidental or consequential damages, or for damages in the nature of penalties.

IF DURING THE WARRANTY PERIOD, CUSTOMER USES A PART FOR THIS DELFIELD EQUIPMENT OTHER THAN AN UNMODIFIED NEW OR RECYCLED PART PURCHASED DIRECTLY FROM DELFIELD OR ANY OF ITS AUTHORIZED SERVICE CENTERS AND/OR THE PART BEING USED IS MODIFIED FROM ITS ORIGINAL CONFIGURATION, THIS WARRANTY WILL BE VOID. FURTHER, DELFIELD AND ITS AFFILIATES WILL NOT BE LIABLE FOR ANY CLAIMS DAMAGES OR EXPENSES INCURRED BY THE CUSTOMER WHICH ARISE DIRECTLY OR INDIRECTLY, IN WHOLE OR IN PART, DUE TO THE INSTALLATION OF ANY MODIFIED PART AND/OR PART RECEIVED FROM AN UNAUTHORIZED SERVICE CENTER. If the warranty becomes void, Customer may purchase from Delfield, if available, a Service Agreement or service at the then current time and materials rate.

For more information on Delfield warranty's log on and check out the service section of our web site at www.delfield.com.



ADDITIONAL FOUR YEAR PROTECTION PLAN (FOR MOTOR-COMPRESSOR ONLY)

| Delfield Model# | Serial # | Installation Date |
|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> |

In addition to the Standard One Year Warranty on the Motor-Compressor contained in the above listed Delfield product (the "Unit"), The Delfield Company ("Delfield") also agrees to repair, or exchange with similar or interchangeable parts in design and capacity at Delfield's option, the defective Motor-Compressor contained in the Unit (the "Motor-Compressor"), or any part thereof, for the Original Purchaser only, at any time during the four (4) years following the initial one (1) year period commencing on the date of installation for the Original Purchaser. **Failure of the Original Purchaser to register the registration card containing the Original Purchasers name, address, date of installation, model number and serial number of the Unit containing the Motor-Compressor within 30 days from the date of installation shall void this warranty.** This additional warranty is only available if the Motor-Compressor is inoperative due to defects in material or factory workmanship, as determined by Delfield in its sole judgement and discretion. The Original Purchaser shall be responsible for returning the defective Motor-Compressor to Delfield prepaid, F.O.B. at the address shown on the back cover of this manual.

The term "Original Purchaser" as used herein means that person, firm, association, or corporation for whom the Unit was originally installed.

The term "Motor-Compressor" as used herein does not include unit base, air or water cooled condenser, receiver, electrical accessories such as relay, capacitors, refrigerant controls, or condenser fan/motor assembly. This warranty does not cover labor charges incidental to the replacement of parts. This warranty further does not include any equipment to which said condensing unit is connected, such as cooling coils, temperature controls or refrigerant metering devices. This warranty shall be void if the Motor-Compressor, in Delfield's sole judgement, has been subjected to misuse, neglect, alteration or accident, operated contrary to the recommendations specified by the Unit manufacturer, repaired or altered by anyone other than Delfield in any way so as, in Delfield's sole judgment, to affect its quality or efficiency or if the serial number has been altered, defaced or removed. This Warranty does not apply to a Motor-Compressor in any Unit that has been moved from the location where it was originally installed. The addition of methyl chloride to the condensing unit or refrigeration system shall void this warranty.

General Conditions

Delfield shall not be liable in any manner for any default or delay in performance hereunder caused by or resulting from any contingency beyond Delfield's control, including, but not limited to, war, governmental restrictions or restraints, strike, lockouts, injunctions, fire, flood, acts of nature, short or reduced supply of raw materials, or discontinuance of any part or the Motor-Compressor by the unit manufacturer.

Replacement of a defective Motor-Compressor is limited to one (1) Motor-Compressor by us during the four (4) year period. Delfield shall replace the Motor-Compressor at no charge.

This warranty does not give the Original Purchaser of the Motor-Compressor the right to purchase a complete replacement Motor-Compressor of the same make or of another make. It further does not permit the replacement to be made with a Motor-Compressor of another kind unless authorized by Delfield. In the event Delfield authorizes the Original Purchaser to purchase a replacement Motor-Compressor locally, only the wholesale cost of the Motor-Compressor is refundable.


Expressly excluded from this warranty are damages resulting from spoilage of goods.

Except as provided in any applicable Standard One Year Limited Warranty or applicable Service Labor Contract, the foregoing is exclusive and in lieu of all other warranties, whether written or oral, express or implied. This Warranty supersedes and excludes any prior oral or written representations or warranties. Delfield expressly disclaims any implied warranties of merchantability, fitness for a particular purpose or compliance with any law, treaty, rule or regulation relating to the Motor-Compressor, and the full liability of Delfield for any breach of this warranty, will be as provided in this warranty.

Other than any applicable Delfield Standard One year Limited Warranty, this Delfield Additional Four Year Protection Plan and any applicable Delfield Service Labor Contract, the Original Purchaser agrees and acknowledges that no other warranties are offered or provided in connection with or for the Motor-Compressor or any part thereof.

In no event will Delfield be liable for special, incidental or consequential damages, or for damages in the nature of penalties.

NOTES:

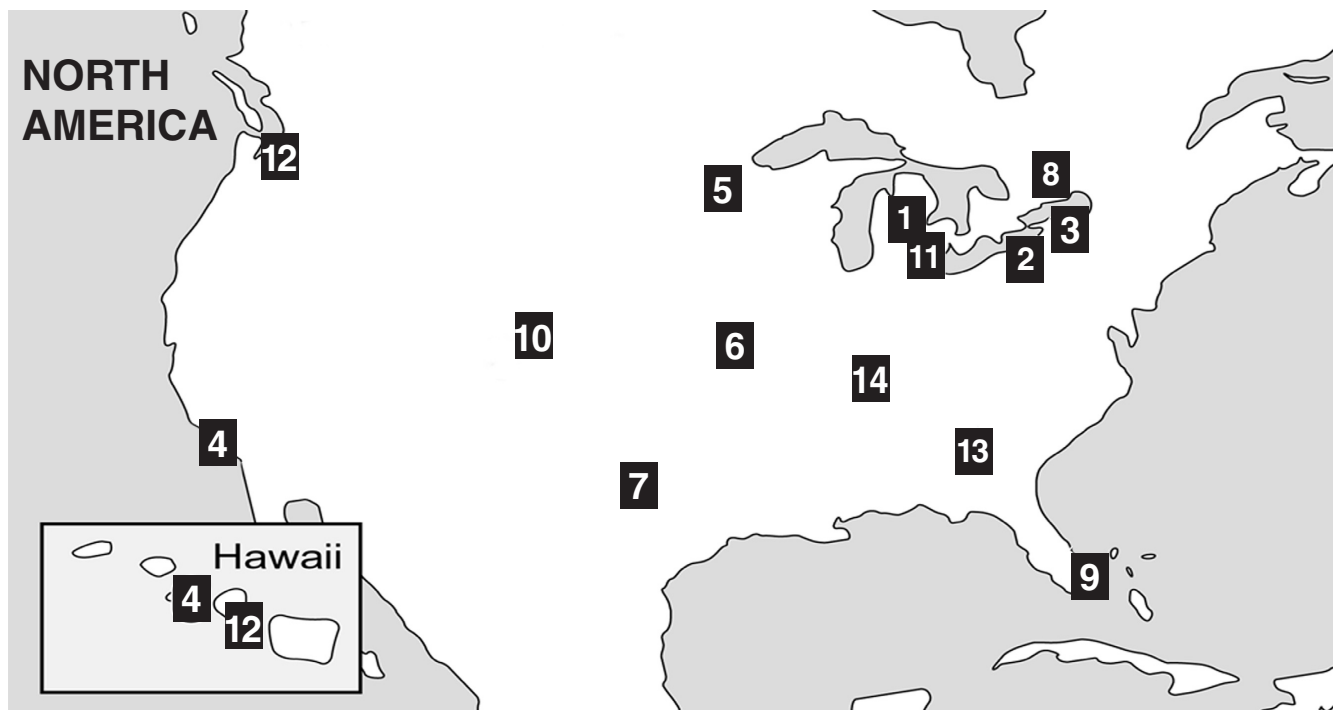

1) The Delfield Company

980 South Isabella Road
Mt. Pleasant, MI 48858
800.733.8829
989.773.7981
989.773.3210 FAX
custom parts direct from Delfield

2) A.I.S. Commercial Parts & Service

1816 West 26th Street
Erie, PA 16508-1149
800.332.3732
814.456.3732
814.452.4843 FAX
serves: MD, NJ, OH, PA, VA, WV

3) Appliance Installation Service

1336 Main Street
Buffalo, NY 14209
800.722.1252
716.884.7425
716.884.0410 FAX
serves: CT, DC, DE, MA, MD, ME,
NH, NJ, NY, PA, RI, VA, VT, WV

4) Pacific Coast Parts

15024 Staff Court
Gardena, CA 90248
1.800.531.1111
1.800.782.5747
Email: orders@pacparts.com
www.pacparts.com
serves: AZ, CA, HI, NV, OR

5) Contract Ice

14450 Ewing Ave S. #100
Burnsville, MN 55306
800.422.2823
952.894.4427
952.894.2164 FAX
serves: IA, MN, MT, ND, SD, WI

6) E.M.C.O. Sales & Distributors

3909 St. Timothy Lane
St. Ann, MO 63074
800.972.7670
314.427.7477
314.427.8190 FAX
serves: AR, IA, IL, KS,
KY, MO, NE, OK, TX, NM, LA

7) Stove Parts Supply/GCS Service

2120 Solona St.
PO Box 14009
Fort Worth, TX 76117-0009
1.800.433.1804 toll free
1.800.272.7358 fax
serves: AR, LA, NM, OK, TX

8) Garland Group

1177 Kamato Road
Mississauga, Ontario L4W1X4
800.427.6668
800.361.7745 FAX
serves: Canada

9) Global Parts and Supplies

2920 N.W. 109th Avenue
Miami, FL 33172
305.994.9994
305.994.9992 FAX
International parts depot

10) Hawkins Commercial Appl. Serv.

3000 S. Wyandot
Englewood, CO 80110
(800) 624-2117
(303) 7618861 FAX
serves: AZ, CO, KS, NE, NM, OK, UT, WY

11) MicroDine, Inc.

44792 Helm
Plymouth, MI 48170
888.828.4454
734.451.2043
734.451.3215 FAX
serves: MI, IN, WI, OH

12) Performance Refrigeration Parts

9923 S.W. 178th St.
Vashon, WA 98070
888.872.2465
206-463-1772
206.463.4431 FAX
serves: AK, HI, ID, MT, OR, WA

13) Southeastern Restaurant Services

2200 Norcross Parkway, Suite 210
Atlanta, GA 30071
800.235.6516
770.446.6177
770.446.3157 FAX
serves: FL, GA, MS, NC, SC, VA

14) T.M.A.

2916 Sidco Drive
Nashville, TN 37204
615.726.0351
800.737.0351
615.259.4100 FAX
serves: TN, AL

Delfield has 14 conveniently located Parts Depots to ensure parts are handled promptly and accurately.

Delfield reserves the right to update or make changes to this list without prior notice

Please call 1-800-733-8829 or check the web at www.delfield.com for a list of the current Parts Depots.



980 S. Isabella Rd., Mt. Pleasant, MI 48804-0470, U.S.A. • (989) 773-7981 or (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com
Delfield reserves the right to make changes in design or specifications without prior notice. 2003 The Delfield Company. All rights reserved. Printed in the U.S.A.

DM500 05/03